



SS316L NEEDLE VALVE 3000PSI MALE X FEMALE

High Pressure Needle Valve · Male x Female NPT · Stainless Steel 316L · T-Handle

BRAND: SWLOK	SKU: SW-6024	SIZE 1/4" TO 1" NPT	3,000 PSI / 207 BAR
--------------	--------------	---------------------	---------------------



FIG. 1 | SS316L NEEDLE VALVE, MALE X FEMALE NPT, T-HANDLE

PRODUCT OVERVIEW

The SWLOK SS316L Needle Valve is a high pressure, multi-turn valve for precise regulation and positive shut-off at low flow rates. A fine-pitch stem drives a tapered needle into the seat, giving accurate throttling and a leak-tight seal at up to 3,000 psi.

The bar stock body is machined from 316L stainless steel with a male NPT inlet and female NPT outlet, so the valve threads directly into a port or fitting. Typical duties are pressure gauge isolation, instrument shut-off, sampling and calibration lines in oil and gas, chemical and marine service.

Valve type	Needle valve, straight pattern
Operation	Manual, multi-turn T-handle
Body material	Stainless steel 316L
End connection	Male NPT inlet x female NPT outlet
Pressure rating	3,000 psi (207 bar) WP
Size range	1/4" to 1" (DN8 to DN25)

TECHNICAL SPECIFICATION

Series	HP-H, high pressure	Working pressure	3,000 psi (207 bar)
Pattern	Straight, through flow	Temperature	-30°C to +200°C
Threads	NPT, ASME B1.20.1	Shell test	1.5 x working pressure, hydrostatic
Bonnet	Screwed, with lock pin	Testing	100% factory tested
Stem packing	PTFE, adjustable	Sour service	Conforms to NACE MR0175
Stem threads	Rolled and lubricated	Flow direction	Marked by arrow on body



PRODUCT DATA SHEET

SS316L NEEDLE VALVE 3000PSI MALE X FEMALE

Ref. SW-6024 | Rev. 01

BILL OF MATERIALS

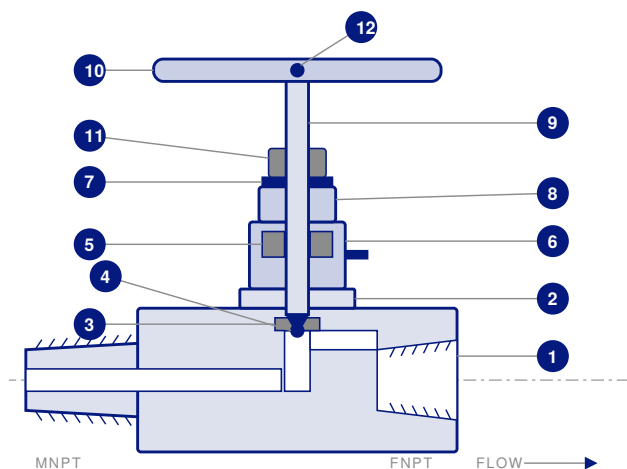


FIG. 2 | SECTIONAL ARRANGEMENT

#	COMPONENT	MATERIAL
1	Valve body	SS316L
2	Chuck nut	SS316
3	Seat	PTFE
4	Ball	SS316
5	Stem seal	PTFE
6	Gland	SS316
7	Spring washer	SS304
8	Lock nut	SS304
9	Stem	SS316
10	Handle	SS304
11	Sleeve	PVC
12	Pin	SS304

Install with flow in the direction of the arrow marked on the body. Valves in other materials are available on request.

DIMENSIONS

SIZE	DN	NPT	L (MM)	S (MM)	H MAX. (MM)
1/4"	DN8	1/4"	50.00	20.00	61.00
3/8"	DN10	3/8"	51.00	22.00	64.00
1/2"	DN15	1/2"	57.00	25.50	64.25
3/4"	DN20	3/4"	68.00	32.00	81.00
1"	DN25	1"	76.00	40.00	87.00

Dimensions for the 3,000 psi male x female version. L = overall length, S = body square, H = maximum height with the valve fully open. All dimensions in mm and nominal, for reference only. Certified drawings for the supplied size are issued on request.

ORDERING INFORMATION

FIELD	OPTIONS
Product code	SW-6024
Size	1/4", 3/8", 1/2", 3/4", 1"
Ends	Male NPT inlet x female NPT outlet
Pressure class	3,000 psi
Material	SS316L body. Other materials on request
Order example	SW-6024 / 1/2" / MNPT x FNPT / 3,000 PSI / SS316L

Stock held in Dubai for fast despatch across the UAE and GCC. Contact our sales desk for pricing, availability, project quantities and certification requirements.



PRODUCT DATA SHEET

SS316L NEEDLE VALVE 3000PSI MALE X FEMALE

Ref. SW-6024 | Rev. 01

PRESSURE AND TEMPERATURE

Working pressure	3,000 psi (207 bar) at ambient
Shell test	4,500 psi (1.5 x WP), hydrostatic
Temperature	-30°C to +200°C with PTFE packing
Media	Liquids and gases compatible with 316L and PTFE

Maximum temperature is limited by the PTFE packing. Pressure ratings reduce at elevated temperature. Confirm duty with SWBM for steam, cyclic or high temperature service.

TYPICAL APPLICATIONS

- Pressure gauge and transmitter isolation
- Instrument shut-off and root valves
- Gas and fluid sampling systems
- Hydraulic test benches and calibration rigs
- Chemical injection and process lines
- Oil and gas, chemical and marine high pressure systems

COMPLIANCE AND QUALITY

- Body machined from SS316L bar stock
- NPT threads to ASME B1.20.1
- Materials conform to NACE MR0175 for sour service
- 100% factory tested, shell test at 1.5 x working pressure
- Heat number marked on every body
- Material test certificate EN 10204 3.1 on request
- Bonnet lock pin prevents accidental bonnet removal

INSTALLATION AND OPERATION

- Flush the line to remove debris before installation
- Install with flow in the direction of the arrow on the body
- Apply PTFE tape or an approved sealant to male NPT threads only
- Hold the valve body flats with a spanner, never the bonnet, when tightening
- Turn the handle clockwise to close and anticlockwise to open. Hand tight shut-off only, do not use extension bars
- If the stem weeps, tighten the packing nut slightly while the valve is depressurised

COMPANY

Sunel Wala Building Materials
Trading Co. LLC (SWBM)
Dubai, United Arab Emirates

SALES ENQUIRIES

info@swbm-fittings.com
Tel: +971 4 238 5652
Mobile / WhatsApp: +971 50 748 1772

ONLINE

www.swbm-fittings.com
Brand: SWLOK

The information in this data sheet is provided in good faith and is believed to be accurate at the date of issue. Dimensions and ratings are nominal and may vary with the manufacturer and production batch. It remains the responsibility of the purchaser to confirm that the product is suitable for the intended service conditions, including the selection of compatible tubing. Sunel Wala Building Materials Trading Co. LLC reserves the right to amend specifications without prior notice. This document does not form part of any contract of sale.